

05/31/00  
JCE41 U.S. PTO  
Sir:

Transmitted herewith for filing is the Patent Application of:

Inventor(s): **Daniel Otto Becker**

For: **DYNAMIC COMMAND SETS IN A COMPUTER MESSAGING SYSTEM IN A METHOD, SYSTEM AND PROGRAM**

Enclosed are:

☒ Patent Specification and Declaration

☒ 4 sheets of drawing(s).

☒ An assignment of the invention to International Business Machines Corporation (includes Recordation Form Cover Sheet).

☐ A certified copy of a ☐ application.

☐ Information Disclosure Statement, PTO 1449 and copies of references.

The filing fee has been calculated as shown below:

For	Number Filed	Number Extra	Rate	Fee
Basic Fee				\$ 690.00
Total Claims	24 - 20	4	x 18 =	\$ 72.00
Indep. Claims	7 - 3	4	x 78 =	\$ 312.00
MULTIPLE DEPENDENT CLAIM PRESENTED			x 260 =	\$
TOTAL				\$1,074.00

☒ Please charge IBM Corporation Deposit Account No. 09-0447 in the amount of \$1,074.00. A duplicate copy of this sheet is enclosed.

☒ The Commissioner is hereby authorized to charge payment of the following fees associated with this communication or credit any overpayment to IBM Corporation Deposit Account 09-0447. A duplicate copy of this sheet is enclosed.

☒ Any additional filing fees required under 37 CFR §1.16.

☒ Any patent application processing fees under 37 CFR §1.17.

CERTIFICATE OF MAILING BY "EXPRESS MAIL" UNDER 37 CFR § 1.10

"Express Mail" mailing label number: EL453464205US

Date of Mailing: May 31, 2000

I hereby certify that the documents indicated above are being deposited with the United States Postal Service under 37 CFR 1.10 on the date indicated above and are addressed to Box Patent Applications, Assistant Commissioner for Patents, Washington, D.C. 20231 and mailed on the above Date of Mailing with the above "Express Mail" mailing label number.

Barbara Spence  
Barbara Spence

Respectfully submitted,

By Brian F. Russell  
Brian F. Russell  
Registration No. 40,796 for  
FELSMAN, BRADLEY, VADEN,  
GUNTER & DILLON, LLP  
201 Main Street, Suite 1600  
Fort Worth, Texas 76102  
Telephone (817) 332-8143

**DYNAMIC COMMAND SETS IN A COMPUTER MESSAGING SYSTEM**  
**IN A METHOD, SYSTEM AND PROGRAM**

**BACKGROUND OF THE INVENTION**

5

**1. Technical Field:**

The present invention generally relates to distributed data processing systems and in particular to client-server data processing systems. Still more particularly, the present invention relates to command sets in a computer messaging system. Further, the present invention relates to modification of command sets on a server in a computer network.

10

15

**2. Description of the Related Art:**

In the area of client-server computing, many computers interact over a computer network through messaging systems. Messages containing code define commands that a client may issue to the server computer to perform tasks on the server, such as accessing databases, starting a process, sorting search results, connecting to other computers, retrieving email, etc.

20

25

Typically, function codes and parameters are encoded in application-specific form. Frequently, the encoding process arranges function codes in a fixed order and with a fixed offset from the beginning of a message. The meaning of the function code and the interpretation of parameters is known only by the sending and receiving applications. As new

releases of applications are prepared, encoding schemes used for function codes may vary. Updating sending and receiving (messaging) applications thus can become a continuous and complex task - especially in widely distributed systems.

5

Whether done by client or server, often there is a function that converts "gestures" or other input into these messages. This function is commonly known as a dispatch table or a command interpreter. An example of such a command interpreter function in the Java programming language is given in Table 1.

10

```

public SimpleCmd readCommand() throws IOException{
    SimpleCmd cmd;
    String commandName = readName();

    if ( commandName.equalsIgnoreCase( "AddCmd" ) ) {
        cmd = new AddCmd();
    } else if (commandName.equalsIgnoreCase( "DeleteCmd" ) ) {
        cmd = new DeletCmd();
    } else if (commandName.equalsIgnoreCase( "GetCmd" ) ) {
        cmd = new GetCmd();
    } else if (commandName.equalsIgnoreCase( "PostCmd" ) ) {
        cmd = new PostCmd();
    } else if (commandName.equalsIgnoreCase( "DoneCmd" ) ) {
        cmd = new DoneCmd();
    } else
        throw new IOException( "unknown command " + commandName );
    cmd.setArgs( readArgs() );

    return cmd;
}

```

TABLE 1

15 The purpose of this function is to take a command name,

given as a string, and find and instantiate a command object that will perform the command. The drawback to this type of dispatch table is the hard-coded nature of the command set. This example tests for five commands, but any commands that are not explicitly coded in the function are ignored and an error condition is signaled. If ever the system needed an additional command, the client or the server would have to be halted while new code is installed on the system.

There are other messaging systems that refer to commands by number rather than a name to reduce traffic congestion. This saves more network bandwidth than sending the command name, but the same problems of static rather than dynamic tables exist. Another type of messaging system creates a command on the client side and sends the entire command object to the server. This is known as command serialization or command marshalling/unmarshalling, and can tax network bandwidth.

There are a variety of situations in which it would be preferable not to halt the system to install new object code for the command interpreter or dispatch table. Most common are commercial sales applications on the Internet, which may experience heavy, round-the-clock traffic. Taking a sales application off-line for an upgrade may result in lost revenue due to customer disaffection.

It would therefore be desirable to provide a method and system that would allow new commands to be installed without

pausing either the client or server computer. Also, it would be desirable to enlarge or reduce a command set without recompiling the code that contains the dispatch table.

## SUMMARY OF THE INVENTION

5 It is therefore one object of the present invention to  
enlarge or reduce a command set without pausing a server  
computer.

10 It is another object of the present invention to provide a  
method that will enlarge or reduce a command set without  
pausing a client computer and without recompiling code that  
contains a dispatch table.

15 The foregoing objects are achieved as is now described.  
Rather than using a command interpreter or dispatch table,  
commands within a messaging system are given a name which  
matches the filename for the class file implementing the  
command. A command name, or command number, may be  
subsequently passed to a server in a messaging system and used  
to dynamically load and instantiate a message command by  
loading a class of the same name. Additional command classes  
20 may therefore be added or deleted, at runtime, from client or  
server code without halting the application. An error  
condition is signaled when the command name is unrecognized,  
when the command code is unavailable or when there are problems  
instantiating an instance of the command class. Once the class  
25 code is loaded, a new instance of the class is created and the  
command object may be utilized.

The above as well as additional objectives, features, and  
advantages of the present invention will become apparent in the

following detailed written description.

## BRIEF DESCRIPTION OF THE DRAWINGS

The novel features believed characteristic of the invention are set forth in the appended claims. The invention itself however, as well as a preferred mode of use, further objects and advantages thereof, will best be understood by reference to the following detailed description of an illustrative embodiment when read in conjunction with the accompanying drawings, wherein:

**Figure 1** depicts a high-level block diagram of a data processing system network in which a preferred embodiment of the present invention may be implemented;

**Figures 2A-2B** are high-level flow diagrams for processes of providing dynamic command sets in a computer messaging system and updating the system with new commands in accordance with a preferred embodiment of the present invention; and

**Figure 3** depicts an example of pseudo-code in the Java programming language for employing commands which may be dynamically updated at run-time in accordance with a preferred embodiment of the present invention.



## DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

With reference now to the figures, and in particular with reference to **Figure 1**, a high-level block diagram of a data processing system network in which a preferred embodiment of the present invention may be implemented is depicted. Data processing system network 102 includes one or more servers 104-106 which are accessible as part of the Internet 108 or other network. Data processing system network 102 also includes one or more clients 110-112 which may access or receive content from servers 104-106. The content may be accessed using any of a variety of messaging system protocols including HyperText Transfer Protocol (HTTP), File Transfer Protocol (FTP), Network News Transfer Protocol (NNTP), Internet Mail Access Protocol (IMAP) or Post Office Protocol (POP).

In accordance with the present invention, a client within data processing system network 102, such as client 112, includes a messaging system client application 114 (e.g., a browser) capable of transmitting messages containing commands to a messaging system server application 116 within a server, such as server 106, within data processing system network 102. The commands are issued by client application 114 to server application 116 in order to cause some operation to be performed by server 106.

In object oriented programs, such as Java programs, commands are typically generated by clients and issued to a server via a messaging system. A function on the client or

server known as a dispatch table or a command interpreter is utilized to take a command and instantiate a command object to ultimately perform the command. If a particular command is not coded in the table or interpreter, the command is ignored and an error condition is signaled. The structures of prior art systems prevent commands, that are not already loaded on the system, from being issued. If a system needed an additional command object, the client or server would have to be halted while new code is installed on the server.

The present invention allows dynamic addition of commands, by loading of new class files, without requiring a system halt or recompiling of a dispatch table. The messaging system of the present invention utilizes commands which have the same name as the filename for the class file containing the source code implementing the command, excluding the filename extension (e.g., ".java"). Thus, for example the command "commandName" corresponds to, and is implemented by source code within, the class file "commandName.java". Command names are transmitted within messages from, for instance, client application 114 to server application 116. The command set supported by either client 114 or server 116, which is defined by the common set of command class files 118 within both systems, may be updated dynamically, without halting the messaging system or application. Rather than shutting down the system, the present invention provides for loading a class file for the new command object at runtime with no need for shutting down the system. A class file for the new command may then be transmitted to the client and/or server. A command object may be instantiated

from the class file as necessary, thus eliminating system downtime for a new command.

Referring now to **Figures 2A-2B**, high-level flow diagrams for processes of providing dynamic command sets in a computer messaging system in accordance with a preferred embodiment of the present invention are illustrated. **Figure 2A** illustrates a process for employing commands within a message system in accordance with the present invention. The process begins with step **202**, which depicts a command name being sent, via a messaging system, to a server to be used to load a class of the same name (except for the filename extension). In Java, employed in the exemplary embodiment of the present invention, and in several other computer languages, a ClassLoader is used to load classes dynamically at run time. Once the class code is loaded, a new instance of the class may be created and the command implemented by the class may be executed. An error condition is signaled if the command name is not recognized.

The process thus passes to step **204**, which illustrates extracting the command name from the message transmitted from the client to the server within the messaging system, and then to step **206**, which depicts a determination of whether the command name is recognized by the system (i.e., whether a class file having a matching name can be located). If the command name is not recognized, the process proceeds to step **208**, which illustrates the system throwing a error signal. New class files may then be dynamically loaded from a predesignated source to accommodate the new command.

Returning to step 206, if the command name is recognized (found to match a class filename, except for the extension), the process proceeds instead to step 210, which depicts a determination of whether the class file source code is available. If the class file source code corresponding to the transmitted command name is not available, the process proceeds to step 208, which depicts the system throwing an error. Again, source code for the required class file may optionally be downloaded from a predesignated source.

If the class file source code is available, the process proceeds instead to step 212, which illustrates instantiating the class file corresponding to the command, and then to step 214, which depicts a determination of whether any problems occurred during instantiation of the class. If so, the process proceeds to step 208, which illustrates the system throwing an error. Otherwise, the process proceeds instead to step 216, which depicts executing the command. From either of steps 208 or 216, the process passes to step 218, which illustrates the process becoming idle until another command is received via the messaging system.

**Figure 2B** illustrates a process for updating the messaging system with new commands in accordance with the present invention. The process begins with step 220, which depicts an update of the command set being initiated. The process first passes to step 222, which illustrates copying new class files for the new command to the client and server or deleting class files for discontinued commands from the client and server,

then to step 224, which depicts loading the new class files within the server. This occurs at runtime, with additional command classes being added to or removed from the client or server code without recompiling any code for a command interpreter or dispatch table. The process then passes to step 226, which illustrates the process becoming idle until another update is initiated.

Referring now to **Figure 3**, an example of pseudo-code in the Java programming language for employing commands which may be dynamically updated at run-time in accordance with a preferred embodiment of the present invention is depicted. In the pseudo-code, 'commandName' is used to load a class of the same name. The command name that is passed in the message system is used to dynamically load and instantiate the message command. Once the class code is loaded, a new instance of the class is created. If 'commandName' is unrecognized, an error condition is signaled. A similar error is generated if 'commandName' is unavailable on the system. However, in the present invention, the dispatch table is not necessary, nor is halting the system, as command classes are loaded dynamically in client or server code.

The present invention has several advantages. Commands may be added or deleted at runtime without recompiling code. Command classes may be added or removed, dynamically, in the client or server code. Maintenance costs are lessened and code is less prone to error when introducing new commands. There is

no dispatch table to recompile, nor is there a command list to maintain.

Also, the present invention has an additional advantage in that sending a command name over a network requires fewer bytes than sending an entire serialized class. Other messaging systems refer to commands by number rather than name. Dynamic command sets, in the present invention, may also refer to each command by number by returning a command identification number to the client for future use.

It is important to note that while the present invention has been described in the context of a fully functional data processing system and/or network, those skilled in the art will appreciate that the mechanism of the present invention is capable of being distributed in the form of a computer usable medium of instructions in a variety of forms, and that the present invention applies equally regardless of the particular type of signal bearing medium used to actually carry out the distribution. Examples of computer usable mediums include: nonvolatile, hard-coded type mediums such as read only memories (ROMs) or erasable, electrically programmable read only memories (EEPROMs), recordable type mediums such as floppy disks, hard disk drives and CD-ROMs, and transmission type mediums such as digital and analog communication links.

While the invention has been particularly shown and described with reference to a preferred embodiment, it will be

understood by those skilled in the art that various changes in form and detail may be made therein without departing from the spirit and scope of the invention.

## CLAIMS:

What is claimed is:

1        1.    A method for generating a command in a computer messaging  
2        system, comprising the steps of:  
3                receiving a command name into a server via said messaging  
4        system; and  
5                utilizing said command name to automatically load a class  
6        file having a name including said command name.

1        2.    The method of claim 1, further comprising:  
2                comparing said command name to existing classes on said  
3        server;  
4                creating a new instance of said class; and  
5                executing said new instance of said class.

1        3.    The method of claim 1, further comprising:  
2                deleting a current command at runtime.

1        4.    The method of claim 1, further comprising:  
2                adding a new command at runtime.



1       5.    A method for employing a command in a messaging system,  
2    comprising the steps of:

3            selecting a command to be executed; and  
4            transmitting, within a message to a system in which the  
5    selected command is to be executed, a command name for the  
6    selected command which matches a portion of a class filename  
7    for a class implementing the selected command.

1       6.    The method of claim 1, transmitting said command name for  
2    said selected command which matches a portion of a class  
3    filename for a class implementing the selected command. further  
4    comprises:

5            comparing said command name to existing classes on said  
6    system;

7            creating a new instance of said class; and  
8            executing said new instance of said class.

- 1        7.    A method for employing a command in a computer network,  
2        comprising:  
3            receiving a message containing a command name; and  
4            locating a class file having a class filename including  
5        said command name; and  
6            loading and instantiating said class file.
- 1        8.    The method of claim 7, further comprising:  
2            comparing said command name to existing said class files;  
3            executing a new instance of said class.

1 9. A system for generating a command, comprising:  
2 selection means for selecting a command to be executed  
3 within a computer network;  
4 transmission means for sending a command name, within a  
5 message, for said selected command which matches a portion of a  
6 class filename for a class implementing said selected command.

1 10. The system of claim 9, further comprising:  
2 means for comparing said command name to existing classes;  
3 means for loading said class file having said command  
4 name;  
5 means for creating a new instance of said class; and  
6 execution means for executing said new instance of said  
7 class.

1 11. The system of claim 9, further comprising:  
2 means for adding a new command at runtime.

1 12. The system of claim 9, further comprising:  
2 means for deleting a current command at runtime.

1 13. A system for employing a command via a messaging system,  
2 comprising:

3 means for receiving a command name into a server via said  
4 messaging system; and

5 means for utilizing said command to automatically load a  
6 class file having a name including said command name.

1 14. The system of claim 13, further comprising:

2 means for comparing said command name to existing classes;

3 means for creating a new instance of said class; and

4 execution means for executing said new instance of said  
5 class.

1 15. The system of claim 13, further comprising:

2 means for adding a new command at runtime.

1 16. The system of claim 13, further comprising:

2 means for deleting a current command at runtime.

1 17. A computer program product within a computer readable  
2 medium having instructions for generating a command,  
3 comprising:

4 instructions within said computer program product for  
5 receiving a command name from a client computer via a messaging  
6 system; and

7 instructions within said computer program product for  
8 utilizing said command name to automatically load a class file  
9 having a name including said command name.

1 18. The computer program product of claim 17, further  
2 comprising:

3 instructions within said computer program product for  
4 comparing said command name to existing classes on said server;

5 instructions within said computer program product for  
6 creating a new instance of said class; and

7 instructions within said computer program product for  
8 executing said new instance of said class.

1 19. The computer program product of claim 17, further  
2 comprising:

3 instructions within said computer program product for  
4 adding a new command at runtime.

1 20. The computer program product of claim 17, further  
2 comprising:

3 instructions within said computer program product for  
4 deleting a current command at runtime.

- 1 21. The computer program product of claim 17, further
- 2 comprising:
- 3 instructions within said computer program product for
- 4 comparing said command name to existing classes on said server.

1 22. A computer program product within a computer readable  
2 medium having instructions for employing a command in a  
3 messaging system, comprising:

4 instructions within said computer program product for  
5 selecting a command to be executed; and

6 instructions within said computer program product for  
7 transmitting, within a message to a system in which the  
8 selected command is to be executed, a command name for the  
9 selected command which matches a portion of a class filename  
10 for a class implementing the selected command.

1 23. The computer program product of claim 22, further  
2 comprising:

3 instructions within said computer program product for  
4 comparing said command name to existing classes on said server;

5 instructions within said computer program product for  
6 loading said class file having said command name;

7 instructions within said computer program product for  
8 creating a new instance of said class; and

9 instructions within said computer program product for  
10 executing said new instance of said class.

1 24. The computer program product of claim 22, further  
2 comprising:

3 instructions within said computer program product for  
4 deleting a current command at runtime.

DYNAMIC COMMAND SETS IN A COMPUTER MESSAGING SYSTEM  
IN A METHOD, SYSTEM AND PROGRAM

**ABSTRACT OF THE DISCLOSURE**

Rather than using a command interpreter or dispatch table, commands within a messaging system are given a name which matches the filename for the class file implementing the command. A command name, or command number, may be subsequently passed to a server in a messaging system and used to dynamically load and instantiate a message command by loading a class of the same name. Additional command classes may therefore be added or deleted, at runtime, from client or server code without halting the application. An error condition is signaled when the command name is unrecognized, when the command code is unavailable or when there are problems instantiating an instance of the command class. Once the class code is loaded, a new instance of the class is created and the command object may be utilized.



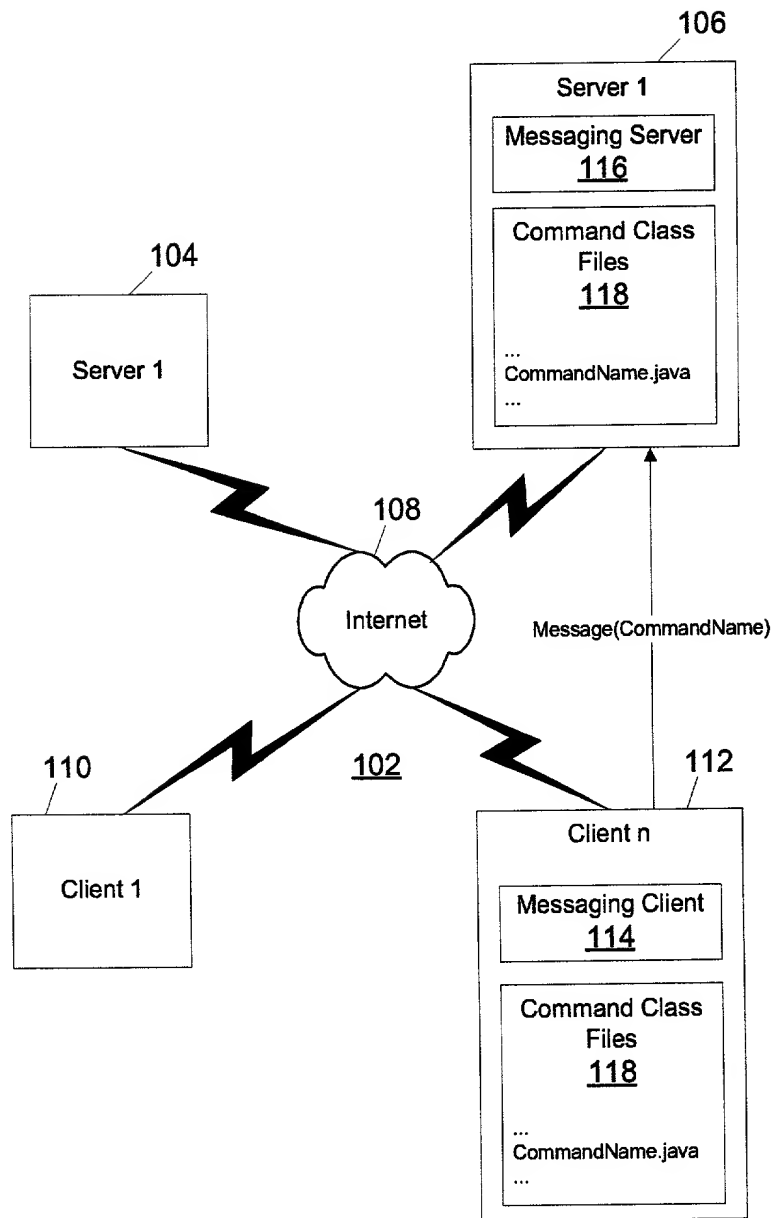


Figure 1

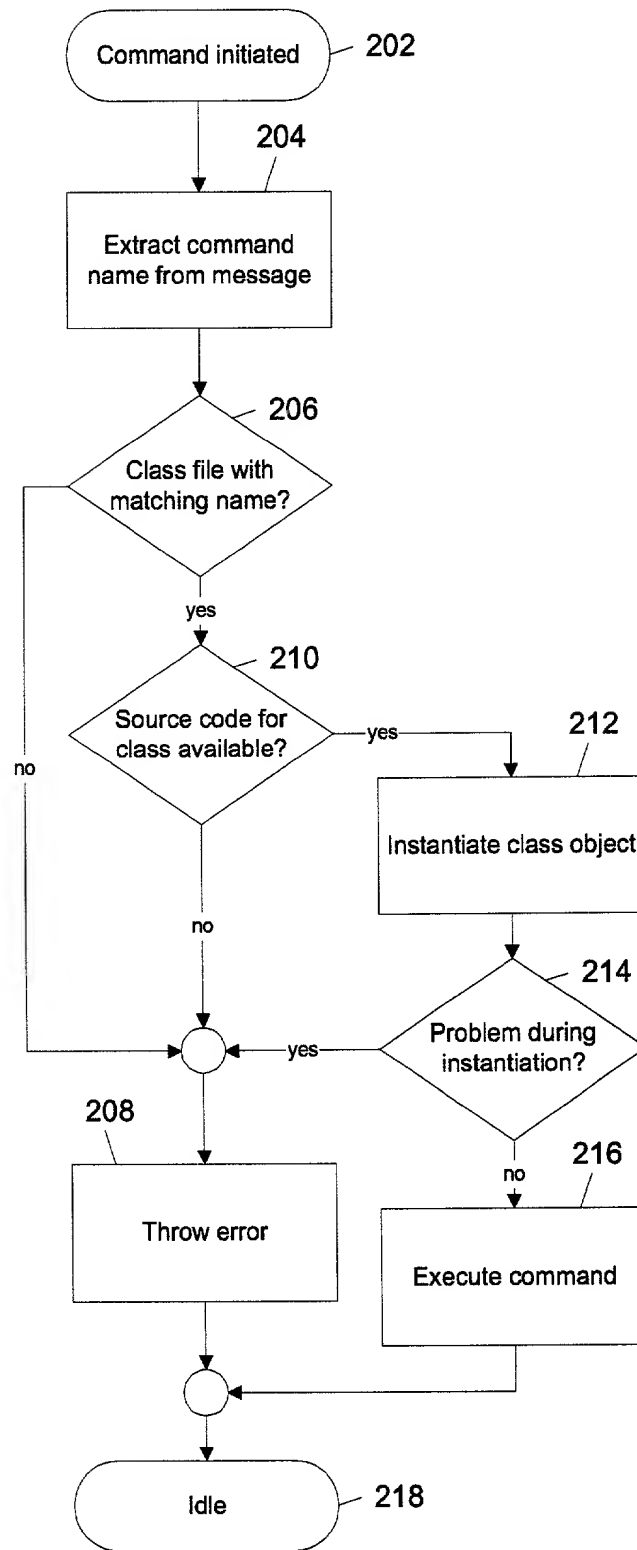


Figure 2A

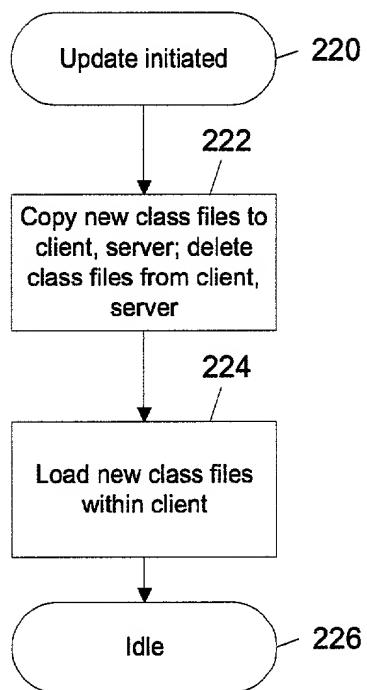


Figure 2B

```
public SimpleCmd readCommand() throws IOException {  
    String commandName = readName();  
    try {  
        Class cmdClass = classloader.loadClass( commandName);  
        ClassNotFoundException  
        SimpleCmd cmd = (SimpleCmd) cmdClass.NewInstance();  
        Cms.setArgs( readArgs() );  
        return cmd;  
    } catch (Exception e) {  
        throw new IOException( "unknown command" + commandName);  
    } /* endcatch */  
}
```

Figure 3

**DECLARATION AND POWER OF ATTORNEY FOR  
PATENT APPLICATION**

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name;

I believe I am the original, first and sole inventor of the subject matter which is claimed and for which a patent is sought on the invention entitled

DYNAMIC COMMAND SETS IN A COMPUTER MESSAGING SYSTEM IN A METHOD, SYSTEM AND PROGRAM

the specification of which (check one)

X is attached hereto.

\_\_\_ was filed on \_\_\_\_\_  
as Application Serial No. \_\_\_\_\_  
and was amended on \_\_\_\_\_  
(if applicable)

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the patentability of this application in accordance with Title 37, Code of Federal Regulations, §1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, §119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

Prior Foreign Application(s):	Priority Claimed
<div style="display: flex; justify-content: space-between;"> <div>             _____ (Number)           </div> <div>             _____ (Country)           </div> <div>             _____ (Day/Month/Year)           </div> </div>	___ Yes___ No

I hereby claim the benefit under Title 35, United States Code, §120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, §112, I acknowledge the duty to disclose information material to the patentability of this application as defined in Title 37, Code of Federal Regulations, §1.56 which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

_____ (Application Serial #)	_____ (Filing Date)	_____ (Status)
---------------------------------	------------------------	-------------------

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorneys and/or agents to prosecute this application and transact all business in the Patent and Trademark Office connected therewith.

John W. Henderson, Jr., Reg. No. 26,907; Thomas E. Tyson, Reg. No. 28,543; Robert M. Carwell, Reg. No. 28,499; Jeffrey S. LaBaw, Reg. No. 31,633; Douglas H. Lefevre, Reg. No. 26,193; Casimer K. Salys, Reg. No. 28,900; David A. Mims, Jr., Reg. No. 32,708; Mark E. McBurney, Reg. No. 33,114; Volel Emile, Reg. No. 39,969; James H. Barksdale, Jr. Reg. No. 24,091; Anthony V. England, Reg. No. 35,129; Leslie A. Van Leeuwen, Reg. No. 42,196; Christopher A. Hughes, Reg. No. 26,914; Edward A. Pennington, Reg. No. 32,588; John E. Hoel, Reg. No. 26,279; and Joseph C. Redmond, Jr., Reg. No. 18,753; Marilyn S. Dawkins, Reg. 31,140; Andrew Mitchell Harris, Reg. No. 42,638; Richard N. McCain, Reg. No. 43,785; Andrew J. Dillon, Reg. No. 29,634; Max Ciccarella, Reg. No. 39,454; Jack V. Musgrove, Reg. No. 31,986; Daniel E. Venglarik, Reg. No. 39,409; Brian F. Russell, Reg. No. 40,796; John G. Graham, Reg. No. 19,563; Matthew W. Baca, Reg. No. 42,277; Justin M. Dillon, Reg. No. 42,486; Antony P. Ng, Reg. No. 43,427; Steven Lin, Reg. No. 35,250; Matthew S. Anderson, Reg. No. 39,093; Sidney L. Weatherford, Reg. No. P45,602; and Mike Noe, Reg. No. 44,975.

Send correspondence to: Andrew J. Dillon, FELSMAN, BRADLEY, VADEN, GUNTER & DILLON, LLP, Lakewood on the Park, Suite 350, 7600B North Capital of Texas Highway, Austin, Texas 78731, and direct all telephone calls to Andrew J. Dillon, 512/343-6116.

FULL NAME OF SOLE OR FIRST INVENTOR: Daniel Otto Becker

INVENTORS SIGNATURE: Daniel O. Becker DATE: 5/31/00

RESIDENCE: 10909 Grapevine Lane  
Austin, Texas 78759

CITIZENSHIP: U.S.A.

POST OFFICE ADDRESS: same